



# Rotary Shaper Follower Kit


Tool instructions

## You will need:

Safety goggles, gloves and a standard tip (flat blade) screwdriver.

## With 1" Rotary Shaper:

Use standard tip screwdriver to attach 1" Follower to bottom of 1" Rotary Shaper.

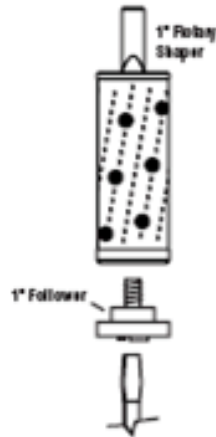


## With 2" Rotary Shaper:

### Step 1:

Using firm uniform pressure, snap 1" Follower into center of 2" Expansion Ring.

### Step 2:

Use standard tip screwdriver to attach assembled unit to bottom of 2" Rotary Shaper.

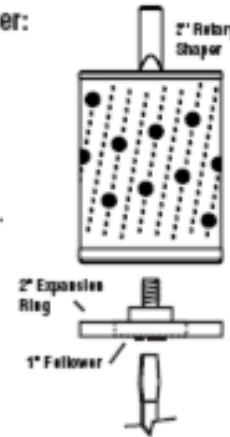

## TYPICAL USE

Use with a template and appropriate spacer to duplicate contours on wood projects. Spacer is to ensure that material to be cut is fully within the Rotary Shaper's cutting zone. (see diagram)

## SAFETY PRECAUTIONS

The Rotary Shaper rotates **clockwise**. Materials being fed into the shaper should be fed left of center to reduce kickback.


Microplane®'s technology creates an extremely sharp cutting tooth. Feed work slowly with light pressure until you become accustomed to the effectiveness of your Microplane® Rotary Shaper.

**Do not use with a damaged spindle or blade.**

Keep hands and fingers clear of blade while in use.

For information or technical assistance call 1.800.555.2767 or go to [www.microplane.com](http://www.microplane.com).

**WARNING!!! WORK SAFELY WITH TOOLS BY WEARING SAFETY GOGGLES AND GLOVES. NOT FOR USE WITH ROUTERS.**

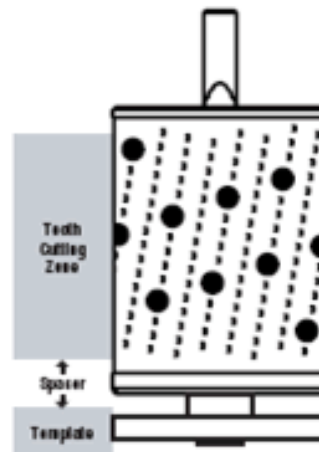

MAXIMUM RPM 2500

Please contact us if you need more information.

Microplane Customer Service

1-800-555-2767

[kitcheninfo@microplane.com](mailto:kitcheninfo@microplane.com)